



## Jurassic Park Stand Up Replacement Installation

1. Remove the three nuts holding the play field plastic in place. Lift up the plastic with the box attached.
2. Remove the two screws holding the metal box to the play field plastic (there are two nuts under the play field plastic that the screws screw into.)
3. Remove the box and play field plastic to expose the wiring hole in the playfield.
4. Flip box over and remove nut holding spot light in place, remove spotlight from metal box. It's not necessary to disconnect the wires on it.
5. Disconnect the 2 flasher wires (Black/Purple and Orange). You can desolder these or just clip them off. Push these two wires through the hole in the play field.
6. Disconnect the wires on the upper light (Red/Green and Yellow/Green).
7. Remove metal box from game.

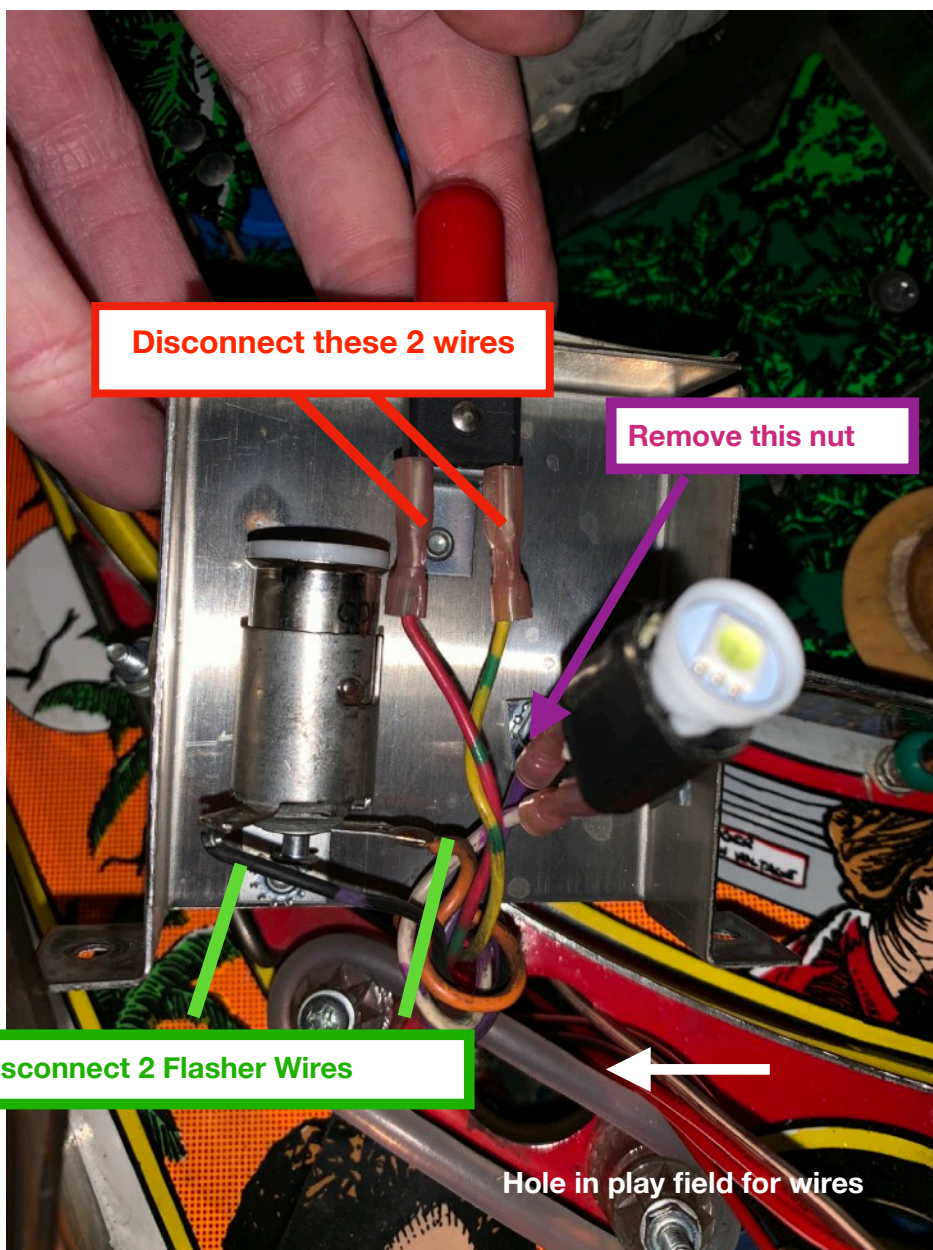

8. Plug Yellow/Green wire into the male flat connector with the RED heat shrink
9. Plug Red/Green wire into male flat connector with BLUE heat shrink
10. Slide spot light bracket into right side slot on back of new box
11. Pass white connector through hole in playfield. If it doesn't fit, you might need to temporarily remove the wires from it. Do so by pushing down on the top tabs while pulling gently on the wires. Then pass the red and black wire through the hole.

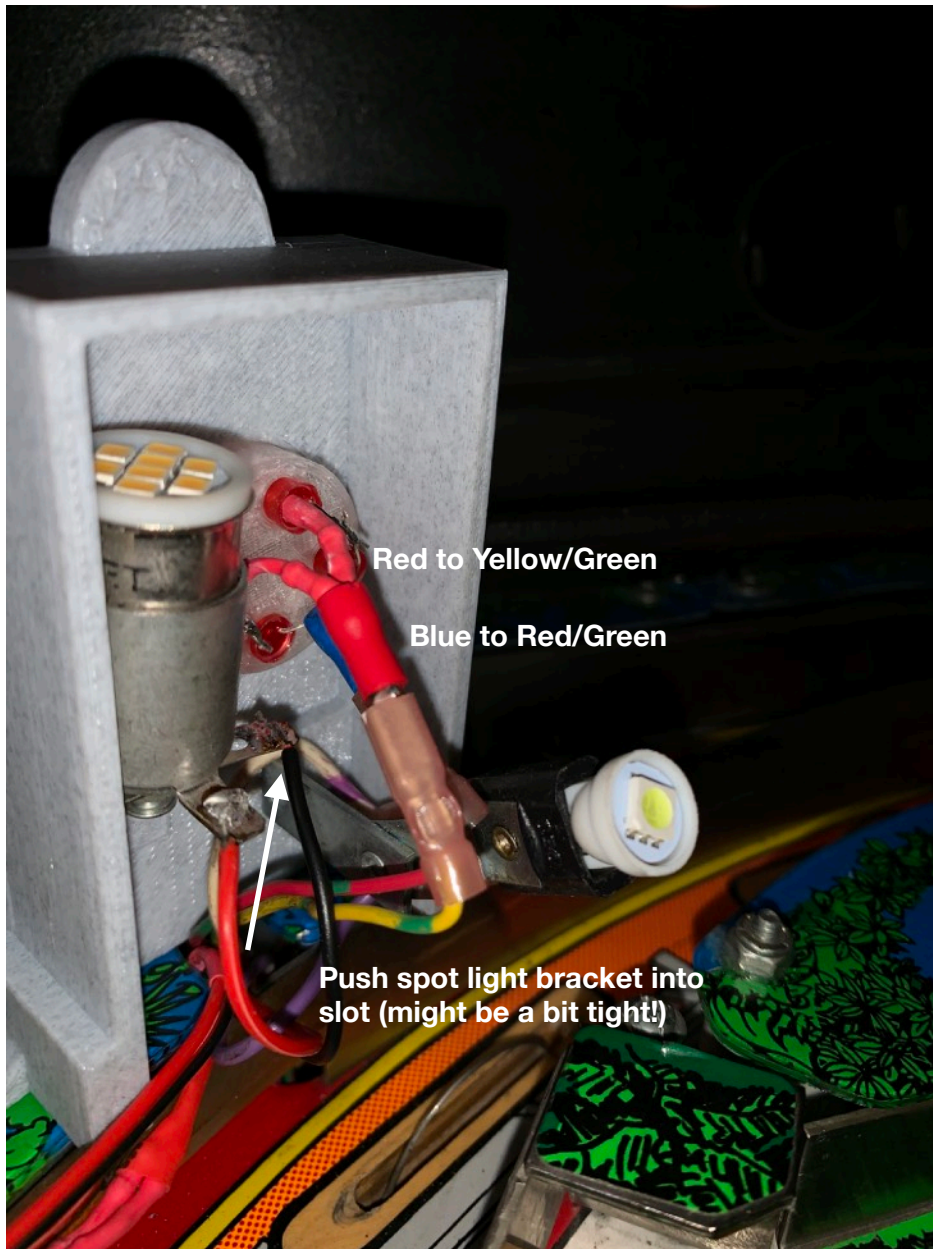

12. Make flasher connection under the playfield. Red from flasher goes to orange, black to black/purple. If you clipped the wire, you'll need to strip off 1/4" or so to expose the base wire before inserting into the white connector. You can also solder these connections.
13. Reinstall the new box to the play field plastic and then the play field plastic back to the posts.

